SENCO®

MAKE IT LAST.

# FASTENERS CATALOGUE

**FIRST EDITION**

Marketed and distributed by AIRCO BRANDS

# Table of Contents

## Introduction

SENCO - Airco Brands ..... 3
Demand Genuine SENCO ..... 4

## SENCO Fasteners

SENCO Nails ..... 6
Flat-Head Nails ..... 6-9
Finish nails ..... 10-12
Coil Nails ..... 13-15
Staples ..... 16-21
Speciality & Flooring Staples (Secret) ..... 22
SENCO Collated Screws ..... 23-25

## Index ..... 26

All content was correct at the time of printing and is subject to change. Printed 2024. © Copyright Airco Brands 2024

SENCO fasteners are precisely engineered to fit both SENCO ProSeries™ and XtremePro™ tools and other leading brands.

The precise engineering of genuine SENCO fasteners reduces jamming and tool wear saving you the cost of expensive repairs and premature tool failure.

So insist on genuine SENCO fasteners whenever you use your SENCO tools.Be SENCO sure and always "Demand genuine SENCO fasteners", proudly marketed by Airco Brands.

Airco Brands is an Australian family-owned company with a proud legacy of three generations leading and managing the business. Airco Brands has provided quality tools and fasteners to the construction, manufacturing, retail and rural markets for over 20 years and is one of the largest diversified fastener companies in Australia and New Zealand, boasting six distribution centres nationally. The Airco Brands portfolio includes SENCO, Otter, COLT, Interbath, Titan, National, Aerofast, and Cobra all of which are synonymous with quality reliability and service.

The combined offer of Airco Brands will give you the range, strength, and performance you require, no matter the task at hand.

It is Airco Brands' vision 'To be the business partner, customer, and employer of choice' and we are continually striving to improve our offering and to ensure an exceptional customer experience for our valued customers.

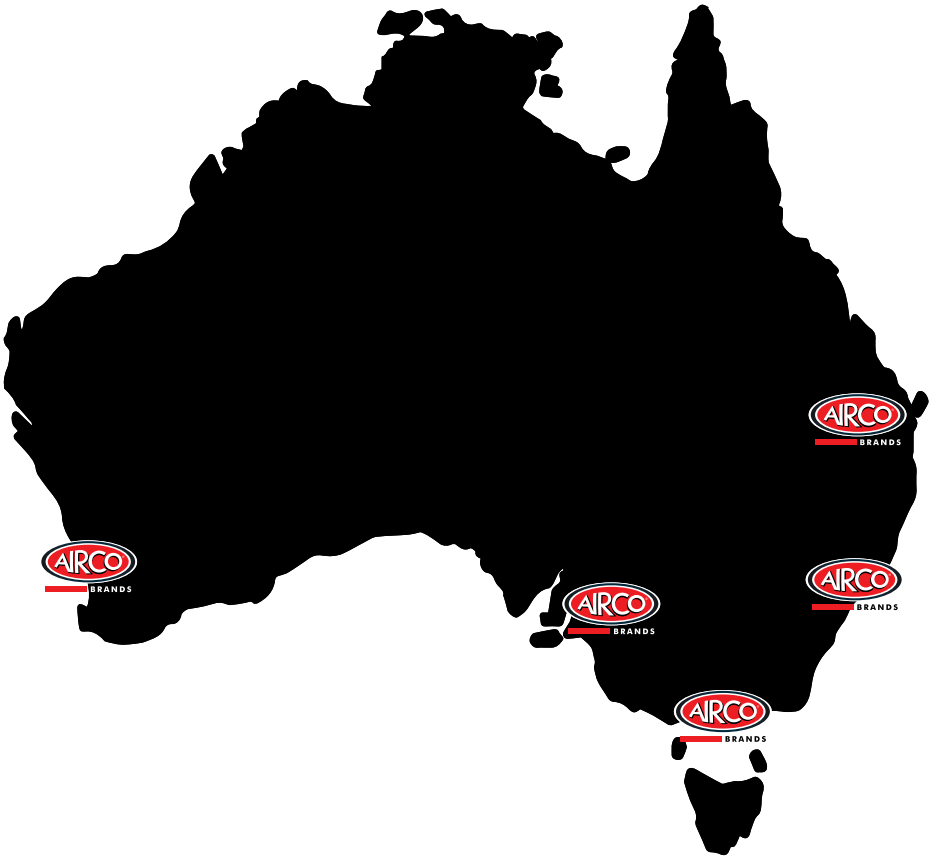


If there is anything you would like to discuss, please call our attentive customer service team toll free on 1300 365 800, +61 3 8787 2900 for international callers or email sales@aircobrands.com.au.

# SENCO Fasteners Precisely Designed to Fit SENCO Tools and leading brands

**All SENCO fasteners are precisely engineered to fit both SENCO ProSeries™ and XtremePro™ tools.**

The precise engineering of genuine SENCO fasteners reduces jamming and tool wear saving you the cost of expensive repairs and premature tool failure.

So insist on genuine SENCO fasteners whenever you use your SENCO tools. Be SENCO sure and always "Demand genuine SENCO fasteners".

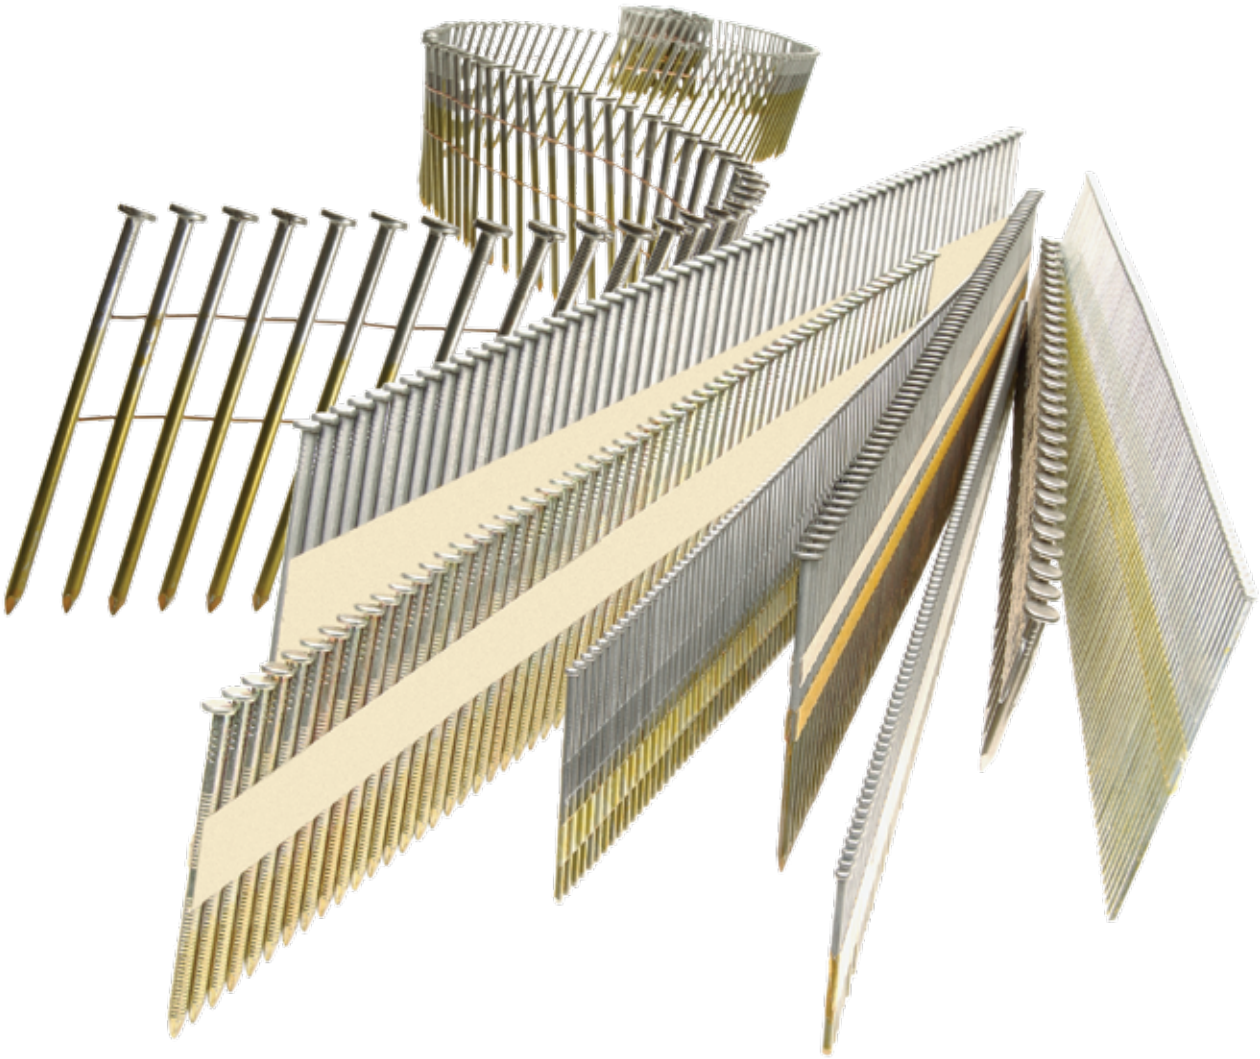

## Demand Genuine SENCO fasteners.

# Reasons to Demand Genuine SENCO Fasteners

**If you know the truth about how choosing the best fasteners can save you time, money and your reputation, you'll always demand SENCO.**
**No other manufacturer can match SENCO's superior quality and product performance.**

## 1 Less broken collation

SENCO engineers have invested heavily to create the absolute best collation technology in the industry – that means no more partially used strips, no more waste – and more dollars that stay in your pocket.
In testing, SENCO collation technology far outperformed competitors brands.

## 2 Fewer tool jams

SENCO engineers demand the tightest manufacturing tolerances in the industry – if our label says they'll fit your tool brand, they're guaranteed to drive in your tool.
No jams mean less downtime, and more work that gets done.

## 3 More completed drives

Strict adherence to fastener specification tolerances, combined with our coating technology, Sencote®, which heats up and lubricates the fastener during each drive, ensures that our staples and nails drive completely time after time.
No shoddy work, no extra work. Sencote® makes our fasteners far more "drivable" in any tool, any type of wood.

## 4 Highest withdrawal values

After it's driven, Sencote® dries and permanently bonds the nail to wood – forever. SENCO fasteners coated with Sencote® have been proven in lab tests to achieve the highest withdrawal values in the industry. Fewer withdrawals mean fewer call-backs and work that stays put.

## 5 Sencote®

Sencote® is a specially formulated glue applied to the lower half of the staple. As you drive the staple, the glue melts, acting as a lubricant to allow for an easier drive into the work surface. Sencote® then re-hardens to bond the fastener to the material, typically wood, for a stronger hold.

# Demand Genuine SENCO fasteners.

# SENCO Nails

Do not think of SENCO nails separately from SENCO tools. They are a major part of SENCO's fastening system and part of the reason that SENCO is recognised as a quality manufacturer of pneumatic and battery operated nailers and staplers. All of our fasteners are designed to fit into the SENCO tool of choice. SENCO fasteners have been designed to allow smaller/lighter tools to drive longer nails.

The angle of the nails is one thing that most people tend to overlook when there is a problem with their tool jamming; however, it is more probable that a nail's "angle" is out of spec., than the tool. It is imperative to select the correct fastener.
Here are six basic parts of a nail.

The type of "head", the shank style of the nail, the shank diameter (gauge), the length of nail required for the job, the best point for the application, and what type of metal/finish does your customer need to do the job correctly. Below and on the next page we have put together some charts to explain the different parts of the nail.

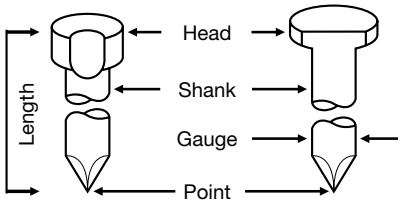


Metal and finish

## Collation

**Glue** – Used for overlapping collation. The fasteners are held closely together to maximize magazine capacity of the tool. No waste is leftover once fired.
**Paper** – No waste is leftover but with a stronger collation hold than glue
**Plastic Tape** – Will not perish in rain or absorb moisture. Leaves only a small amount of waste plastic.

## Head

Located at the top of the nail, is visible at the surface of the material where the fastener has been driven.

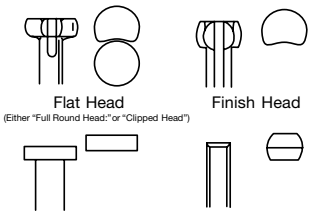


| Type of head | Description | Benefit |
|---|---|---|
| **Flat** | Round, "D" or "C" head nails | More holding power, used for framing and other applications |
| **Dome** | Head sits proud above the surface | Commonly found on Decking Nails |
| **Finish** | True finish head nail | A more professional look. Mainly used in finish applications |
| **Brad** | Further designated as standard, slight or medium | Mainly used for fine finish applications where splitting may be a concern |
| **Headless** | No head on a brad type nail | Used in fine finish applications |

## Shank

The length or body of the nail, described by the wire length, diameter (or gauge) of the wire, and by type (special characteristics).
Length of the shank is described in millimetres. SENCO recommends that you have the customer specify the exact: length, shank size, shank style and head type. This will allow for fewer mistakes in the long run.

| Type of shank | Description | Benefit |
|---|---|---|
| Ring | Provides more holding power | Especially good for high moisture/treated soft woods |
| Screw | Provides better holding power | Used in hardwood pallet and crating industry |
| Smooth | No deformations, most common shank type | Used for basic wood applications |

## Point

The point of the nail determines how the nail penetrates the surface of the material and the amount of holding power the nail will have. (The holding power is based on the amount of damage to the wood fibres by the nail point when the nail is driven. The greater the damage to the wood fibres, the less the holding power.)

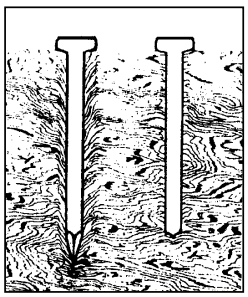

*Diamond point pushes fibres aside causing timber to split. Bunt nail tears fibres so timber doesn't split.*

| Type of point | Description | Benefit |
|---|---|---|
| **Shear** | Dullest point | Avoids wood splitting |
| **Chisel** | Not as sharp as a Diamond point | Avoids splitting wood, cuts the wood rather than pushing through it |
| **Diamond** | Sharpest point | Most common for framing, joists/truss applications (can cause splitting of wood) |
| **Conical** | Suitable for piercing steel | Commonly used on nails in steel-frame construction |

## Gauge

Diameter or thickness of the shank is described in "gauge" or millimetres (Higher numerical gauge values represent thinner diameters). SENCO's thinnest gauge nail is 18 gauge. SENCO's thickest is 101/4 gauge.

# Finish

Finishes, as well as nail shank styles and point type, are important in determining suitability for an application.

| Type of metal | Description | Benefit |
|---|---|---|
| Plain | No rust protection | Affordable fastener |
| SENCOte® | Lubricant/Glue | Allows the nail to be driven into the wood easier, then hardens into a glue for better holding power |

# Metal

The type of metal used in the nail, as well as nail shank styles and point type, is important in determining suitability for an application.

| Type of metal | Description | Benefit |
|---|---|---|
| Bright basic, heat treated | Hardened, but not galvanised | For sill plate attachment to green concrete |
| Bright basic, standard tensile | Non-galvanised | Used for Framing, Joists, Roofing and structural construction |
| Regular galvanised (ZP) | Zinc coated (minimal corrosion resistance) | Varied applications |
| Regular galvanised wire (Brads) | Zinc coated (minimal corrosion resistance) | Standard strength wire, varied applications |
| Hot dip galvanised | Process involves dipping the fasteners in molten zinc (43+ microns is typical) | Offers extended corrosion protection and is ideal for most external house construction applications which are not close to the ocean |
| Stainless Steel | Grade 304 is standard | Recommended for outdoor applications such as fastening into treated pine and cedar which is highly corrosive and applications near the ocean |

# 7 Digit nail coding system

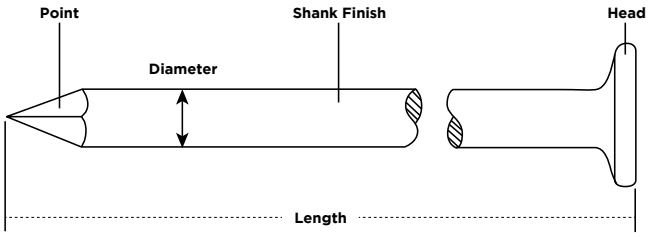


# Nail code chart

| 1st digit | 2nd digit | 3rd & 4th digits | 5th digit | 6th digit | 7th digit |
|---|---|---|---|---|---|
| Diameter | Head/shank | Length | Point | Wire/finish | Finish |
| D. 1.75mm | A. Brad head, smooth | 13–25mm | A. Diamond xtd. 45$^0$ | A. Std. carbon zinc plated | A. Plain |
| B. 2.50mm | C. Flat head | 15–32mm | B. Blunt diamond 60$^0$ | G. Stainless steel | B. SENCOte® |
| E. 2.25mm | E. Flat/ring shank | 17–38mm | C. Shear | P. Std. carb bright basic | |
| G. 2.87mm | F. Flat/screw shank | 18–40mm | E. Chisel | S. Hot dip galv | |
| H. 3.06mm | | 19–45mm | S. Sharp diamond 30$^0$ | X. Hardened & zinc | |
| J. 2.70mm | | 21–50mm | | Z. Gal. wire for brads | |
| K. 3.33mm | | 23–57mm | | | |
| U. 2.0mm | | 24–60mm | | | |
| | | 25–65mm | | | |
| | | 27–75mm | | | |
| | | 28–80mm | | | |
| | | 29–90mm | | | |
| | | 100–100mm | | | |

# FRAMING NAILS

APPLICATIONS

**Framing, trusses/roofing, joists/flooring, structural ply, decking, wood-to-green concrete, crate and box assembly, heavy-duty pallets and fencing**

SN325XP

SN751XP

F-35XP

HC27APB

Nail
Plain shank,
D head
Gauge
11" (3.06mm)
11 1/2" (2.87mm)

GE21APB

Nail
Ring shank,
D head
Gauge
11 1/2" (2.87mm)
11" (3.06mm)
10" (3.33mm)

Plain Shank

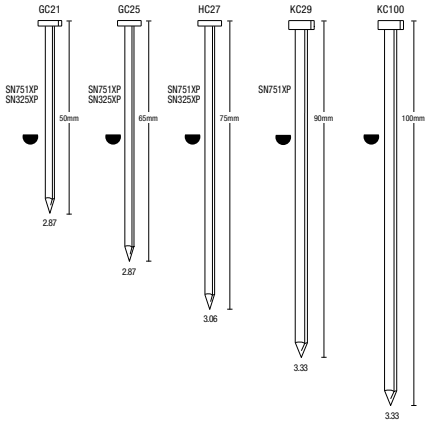


Ring Shank

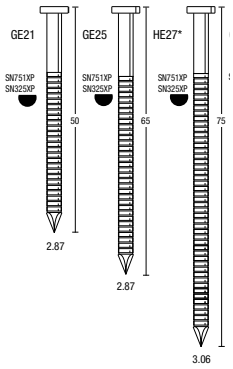


Screw Shank




## D Head Framing Nail

Plain Shank

| Product Code | Size mm | Point | Shank | Finish | Qty (000's) | SN751XP F-35XP | SN325XP |
|---|---|---|---|---|---|---|---|
| **GC21APB** | 2.87x50 | Diamond | Plain | Bright/Sencote® | 3 | X | X |
| **GC21ASB** | 2.87x50 | Diamond | Plain | HDG/Sencote® | 3 | X | X |
| **GC25APB** | 2.87x65 | Diamond | Plain | Bright/Sencote® | 3 | X | X |
| **GC25ASB** | 2.87x65 | Diamond | Plain | HDG/Sencote® | 3 | X | X |
| **HC25APB** | 3.06x65 | Diamond | Plain | Bright/Sencote® | 3 | X | X |
| **HC27AAB** | 3.06x75 | Diamond | Plain | ZPlate/Sencote® | 3 | X | X |
| **HC27APB** | 3.06x75 | Diamond | Plain | Bright/Sencote® | 3 | X | X |
| **HC27ASB** | 3.06x75 | Diamond | Plain | HDG/Sencote® | 3 | X | X |
| **HC27CPB** | 3.06x75 | Shear | Plain/Blunt | Bright/Sencote® | 3 | X | X |
| **KC29APB** | 3.33x90 | Diamond | Plain | Bright/Sencote® | 3 | X | |
| **KC29ASB** | 3.33x90 | Diamond | Plain | HDG/Sencote® | 3 | X | |
| **KC100APB** | 3.33x100 | Diamond | Plain | Bright/Sencote® | 2 | | |

## D Head Framing Nail

Ring Shank

| Product Code | Size mm | Point | Shank | Finish | Qty (000's) | SN751XP F-35XP | SN325XP |
|---|---|---|---|---|---|---|---|
| **GE21APB** | 2.87x50 | Diamond | Ring | Bright/Sencote® | 3 | X | X |
| **GE25APB** | 2.87x65 | Diamond | Ring | Bright/Sencote® | 3 | X | X |
| **HE27APB** | 3.06x75 | Diamond | Ring | Bright/Sencote® | 3 | X | X |

## D Head Framing Nail

Screw Shank



| Product Code | Size mm | Point | Shank | Finish | Qty (000's) | SN751XP F-35XP | SN325XP |
|---|---|---|---|---|---|---|---|
| **HF27APB** | 3.06x75 | Diamond | Screw | Bright/Sencote® | 3 | X | X |

# Framing Nails



Framing nails are a hardened screw shank nail used in steel frame applications.

| Product Code | Size mm | Point | Shank | Finish | Qty (000's) | SN751XP F-35XP | SN325XP |
|---|---|---|---|---|---|---|---|
| **Gold55** | 55x3.15 | Ballistic | Screw | Hardened | 3 | X | X |
| **Gold65** | 65x3.15 | Ballistic | Screw | Hardened | 2 | X | X |

# Metal Connector Nails

Joist connector nail.

| Product Code | Size mm | Point | Shank | Finish | Qty (000's) | JP150XP |
|---|---|---|---|---|---|---|
| **M002262** | 38x3.33 | Diamond | Plain | HDG | 0.5 | X |

APPLICATIONS

**Steel framing, trusses/roofing, joists/flooring, steel structural applications**

JP150XP

Gold55 Box

Gold65 Box

# BRAD NAILS

APPLICATIONS

**DA, RH & C Brads -** Interior fit out, skirting boards, door jams and general purpose fit out

**C1, AY Brads -** Decorative beading, picture frames, millwork, caskets and cabinet making

**Suit SENCO tools**
FIP42XP
FIP30XP
FIP35MG
F15XP

Brad Nail
Smooth shank,
brad-head finishing
15 Gauge
(1.75mm)
*Note*
*All nail measurements are in millimetres*

TN51PIP

DA25EZB Pack

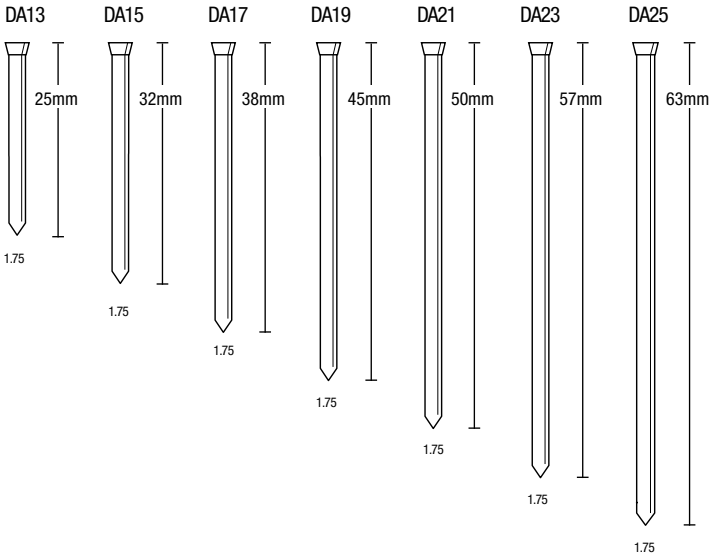


## DA Brads - 15 Gauge

| Product Code | Size mm | Finish | Qty (000's) | Cartons/ Outer | FIP42XP *F-15XP FIP35MG TN51PIP | FIP30XP |
|---|---|---|---|---|---|---|
| **DA13EPB** | 1.75x25 | Bright/Sencote® | 3 | 4 | X | X |
| **DA13EZB** | 1.75x25 | GalWire/Sencote® | 3 | 4 | X | X |
| **DA15EPB** | 1.75x32 | Bright/Sencote® | 3 | 4 | X | X |
| **DA15EZB** | 1.75x32 | GalWire/Sencote® | 3 | 4 | X | X |
| **DA17EPB** | 1.75x38 | Bright/Sencote® | 3 | 4 | X | X |
| **DA17EZB** | 1.75x38 | GalWire/Sencote® | 3 | 4 | X | X |
| **DA17AIA** | 1.75x38 | Hardened/Sencote® | 4 | 4 | X | X |
| **DA19EPB** | 1.75x45 | Bright/Sencote® | 3 | 4 | X | X |
| **DA19EZB** | 1.75x45 | GalWire/Sencote® | 3 | 4 | X | X |
| **DA19AIA** | 1.75x45 | Hardened/Sencote® | 4 | 4 | X | X |
| **DA21EPB** | 1.75x50 | Bright/Sencote® | 3 | 4 | X | X |
| **DA21EZB** | 1.75x50 | GalWire/Sencote® | 3 | 4 | X | X |
| **DA23EPB** | 1.75x57 | Bright/Sencote® | 3 | 4 | X | |
| **DA23EZB** | 1.75x57 | GalWire/Sencote® | 3 | 4 | X | |
| **DA25EPB** | 1.75x65 | Bright/Sencote® | 3 | 4 | X | |
| **DA25EZB** | 1.75x65 | GalWire/Sencote® | 3 | 4 | X | |

** F15XP not suited to 25mm brads*

Code explanation
EPB = Chisel point, bright steel, coated
EZB = Chisel point, galvanised wire, coated
AIA = Ballistic point, hardened

## Brad RH Series - 16 gauge, angled

| Product Code | Size mm | Finish | Box Qty (000's) | Cartons (Boxes) |
|---|---|---|---|---|
| **RH15EAA** | 32x1.6 | Zinc Plated | 2 | 6 |
| **RH17EAA** | 38x1.6 | Zinc Plated | 2 | 6 |
| **RH19EAA** | 45x1.6 | Zinc Plated | 2 | 6 |
| **RH21EAA** | 50x1.6 | Zinc Plated | 2 | 6 |
| **RH25EAA** | 64x1.6 | Zinc Plated | 2 | 6 |

## Brad C1 Series - 18 gauge

| Product Code | Size mm | Finish | Box Qty (000's) | Cartons (Boxes) | FIP18 F18XP BN31MIP |
|---|---|---|---|---|---|
| **C119** | 19x1.25 | Bright | 5 | 12 | X |
| **C125** | 25x1.25 | Bright | 5 | 12 | X |
| **C130** | 30x1.25 | Bright | 5 | 12 | X |
| **C140** | 40x1.25 | Bright | 5 | 12 | X |
| **C150** | 50x1.25 | Bright | 5 | 12 | X |

## Brad C Series - 16 gauge

| Product Code | Size mm | Finish | Box Qty (000's) | Cartons (Boxes) | FIP16XP TN41PIP |
|---|---|---|---|---|---|
| **C19** | 19x1.6 | Zinc Plated | 4 | 8 | |
| **C25** | 25x1.6 | Zinc Plated | 4 | 8 | |
| **C32** | 32x1.6 | Zinc Plated | 4 | 8 | X |
| **C38** | 38x1.6 | Zinc Plated | 4 | 8 | X |
| **C45** | 45x1.6 | Zinc Plated | 4 | 8 | X |
| **C50** | 50x1.6 | Zinc Plated | 4 | 8 | X |
| **C63** | 63x1.6 | Zinc Plated | 4 | 8 | X |

## AY Series Slight Head Brad 18 gauge

| Product Code | Size mm | Finish | Box Qty (000's) | Cartons (Boxes) | SLP20XP |
|---|---|---|---|---|---|
| **AY10EAA** | 15x1.2 | Zinc Plated | 5 | 24 | X |
| **AY11EAA** | 20x1.2 | Zinc Plated | 5 | 20 | X |
| **AY13EAA** | 25x1.2 | Zinc Plated | 5 | 16 | X |

APPLICATIONS

**DA, RH & C Brads -** Interior fit out, skirting boards, door jams and general purpose fit out

**C1, AY Brads -** Decorative beading, picture frames, millwork, caskets and cabinet making

RH15EAA Box

TN41PIP

C32 Box

# COIL NAILS

| APPLICATIONS |
| --- |
| Siding (including fibre cement), decking, exterior trim, fencing, cladding, bracing, subflooring, wood shingles, crate and box assembly, floor sheathing and more. |

# COIL NAILS

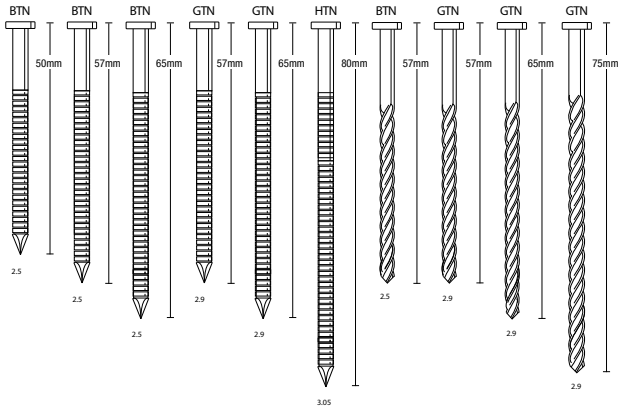

SN71P1

**Suit SENCO tools**
SN71P1
SCN58A

## Wire & Plastic Collated 15º

### Pallet Coil Nails

| Product Code | Size mm | Shank | Collation | Finish | Qty 000'S | SN71P1 | SCN58A |
|---|---|---|---|---|---|---|---|
| GTN57APB | 2.9x57 | Plain | Wire | Bright | 8 | X | X |
| GTN57APBR | 2.9x57 | Ring | Wire | Bright | 8 | X | X |

## Twin Pack Coil Nails 15º

### Bracing Coil Nails (2 coils per box)

| Product Code | Size mm | Shank | Collation | Finish | Qty 000'S | SN71P1 | SCN58A |
|---|---|---|---|---|---|---|---|
| BF16AHAFTP | 2.5x35 | Screw/HD | Plastic | ZP | 0.6 | X | X |
| BF15AHAUTP | 2.5x32 | Screw/HD | Plastic | Bright | 0.4 | X | X |

BF16AHAFTP Twin Pack & Coil Nails

### General Coil Nails

| Product Code | Size mm | Shank | Collation | Finish | Qty 000'S | SN71P1 | SCN58A |
|---|---|---|---|---|---|---|---|
| BTN50APBTP | 2.5x50 | Plain | Wire | Bright | 0.6 | X | X |
| BTN57APBS | 2.5x57 | Screw | Wire | Bright | 10 | X | X |

### Decking Coil Nails

| Product Code | Size mm | Shank | Collation | Finish | Qty 000'S | SN71P1 | SCN58A |
|---|---|---|---|---|---|---|---|
| BM21AGAUTP | 2.5x50 | Screw/ Dome | Plastic | S/Steel | 0.4 | X | X |
| BO21AGAUTP | 2.5x50 | Ring/ Dome | Plastic | S/Steel | 0.4 | X | X |
| BM21ASAUTP | 2.5x50 | Screw/ Dome | Plastic | HDG | 0.4 | X | X |
| BO21ASAUTP | 2.5x50 | Ring/ Dome | Plastic | HDG | 0.4 | X | X |

BM21AGAUTP Twin Pack & Coil Nails

APPLICATIONS

Bracing & Cladding

JC15ASAUP Trade Pack & Coil Nails

BO21AGAU Trade Pack & Coil Nails

BO21ASAD Trade Pack & Coil Nails

# TradePack Coil Nails 15º Plastic Collated

## Cladding Coil Nails

| Product Code | Size mm | Shank | Collation | Finish | Qty 000'S | SN71P1 | SCN58A |
|---|---|---|---|---|---|---|---|
| JC15ASAUP | 2.5x32 | Screw/HD | Plastic | HDG | 3.6 | X | X |
| BE19ASAUM | 2.5x45 | Ring/Flat | Plastic | HDG | 1.8 | X | X |
| BE21ASAUM | 2.5x50 | Ring/Flat | Plastic | HDG | 1.8 | X | X |

## Bracing Coil Nails Plastic collated

| Product Code | Size mm | Shank | Collation | Finish | Qty 000'S | SN71P1 | SCN58A |
|---|---|---|---|---|---|---|---|
| JC15AUAU | 2.7x32 | Plain | Plastic | DAC | 9.6 | X | X |
| JF15AUAU | 2.7x32 | Screw | Plastic | DAC | 9.6 | X | X |
| BF15AHAUP | 2.5x32 | Screw/Flat | Plastic | ZP | 3.6 | X | X |
| BF17AHAU | 2.7x32 | Plain/HD | Plastic | ZP | 4.8 | X | X |

## Bracing Coil Nail Wire collated

| Product Code | Size mm | Shank | Collation | Finish | Qty 000'S | SN71P1 | SCN58A |
|---|---|---|---|---|---|---|---|
| BF16AHAF | 2.5x35 | Screw/HD | Wire | ZP | 9.6 | X | X |

## Decking Coil Nails

| Product Code | Size mm | Shank | Collation | Finish | Qty 000'S | SN71P1 | SCN58A |
|---|---|---|---|---|---|---|---|
| BM21AGAU | 2.5x50 | Screw/Dome | Plastic | S/Steel | 1.6 | X | X |
| BO21AGAU | 2.5x50 | Ring/Dome | Plastic | S/Steel | 1.6 | X | X |
| BM21ASAU | 2.5x50 | Screw/Dome | Plastic | HDG | 1.6 | X | X |
| BO21ASAU | 2.5x50 | Ring/Dome | Plastic | HDG | 1.6 | X | X |

# Coil Nails 0º Plastic Collated

## Bracing Coil Nails

| Product Code | Size mm | Shank | Collation | Finish | Qty 000'S |
|---|---|---|---|---|---|
| BF15AHAD | 2.5x32 | Screw/HD | Plastic | ZP | 4.8 |
| JF15AUAD | 2.7x32 | Screw | Plastic | DAC | 10.8 |

## Cladding Coil Nails

| Product Code | Size mm | Shank | Collation | Finish | Qty 000'S |
|---|---|---|---|---|---|
| BC21AUAD | 2.5x50 | Plain | Plastic | DAC | 7.2 |
| BE21AUAD | 2.5x50 | Ring | Plastic | DAC | 7.2 |

## Decking Coil Nails

| Product Code | Size mm | Shank | Collation | Finish | Qty 000'S |
|---|---|---|---|---|---|
| BM21ASAD | 2.5x50 | Screw/Dome | Plastic | HDG | 1.8 |
| BO21ASAD | 2.5x50 | Ring/Dome | Plastic | HDG | 1.8 |

# Coil Nail Code System for SENCO Wire & Plastic Sheet Collated Nails

**1st Digit = Diameter**
P = 2.2mm
B = 2.5mm
J = 2.7mm
G = 2.9mm
H = 3.05mm

**3rd and 4th Digit = Length**
15 = 32mm
17 = 38mm
19 = 45mm
21 = 50mm
23 = 57mm
25 = 65mm
27 = 75mm
29 = 90mm

**5th Digit = Point**
A = Diamond
B = Blunt Diamond
C = Blunt
E = Chisel
F = Blunt Chisel
S = Sharp

**7th Digit = Finish**
A = Plain
B = SENCOte®
C = Painted
D = Painted & SENCOte®
E = Coated - other

**BC21APAU**

**2nd Digit = Head and Shank type**
C = Smooth
E = Ring
F = Screw
M = Screw/dome head
O = Ring/dome head

**6th Digit = Wire and finish**
A = Regular Galvanised Standard tensile
B = Regular Galvanised Olive drab
D = "Weathertex 11"
E = EverGuard
G = Stainless Steel 304
H = Bright Basic Heat Treated
J = MaxiCoat
M = Aluminium
P = Bright Basic, Medium carbon
S = Hot Dip Galvanised
T = Roofing Nail, Galvanised
U = Dacrotised

**8th Digit = Coil**
F = Coil, Wire, 15°
U = Coil, Plastic 15°
D = Coil, Plastic 0°

# SENCO STAPLES

**Do not think of SENCO staples separately from SENCO tools. They are a major part of SENCO's fastening system and part of the reason that SENCO is recognised as a quality manufacturer of pneumatic and battery operated Nailers and Staplers. All of our fasteners are designed and engineered to fit into our tools to ensure you get the best performance out of your tools.**

There are five basic parts of a staple. The crown or width of the staple, the thickness or gauge of the staple, the leg length of staple required for the job, the best point for the application, and what type of metal & finish coating does your customer need to do the job correctly.

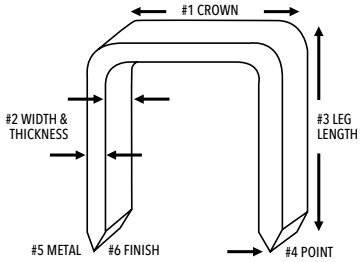


On the following pages, we have included some charts to help with these decisions.

## Crown

The top of the staple, visible at the surface where the staple has been driven. A "crown" is categorised by width. Generally, staples with wider crowns have more holding power. Wider crown staples can be used in crating or roofing. Medium crown staples can be recommended for furniture assembly or aluminum cladding and manufactured housing applications. Narrow crown staples would be appropriate for cabinets, some wood finishing and moulding.

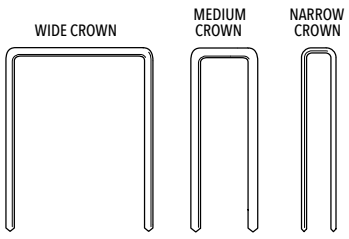


## Gauge

Diameter or thickness of the leg is described in "gauge" (higher numerical gauge values represent thinner diameter). SENCO's thinnest gauge staple is the 22-gauge "A" wire. SENCO's thickest staple is the 15 gauge "Q" wire.

# SENCO STAPLES

## Leg

The length and type, affect driving penetration and holding power.

## Point

The point of the staple determines how the staple penetrates the surface of the material and the amount of holding power the staple will have. There are currently 3 different types of points that are available on SENCO staples.

| Type of point | Description | Benefit |
|---|---|---|
| Blunt | The staple is cut at right angle to the leg so that the end is flat across   | This point shears wood fibres when driven as opposed to separating them. It is good to use in hard woods to stop or reduce splitting of timber. Legs tend to stay straight |
| Chisel | Both cutting edges are parallel to the crown but opposite each other   | This is our most popular point. Although the legs are basically parallel they will tend to bow toward each other, which increases the holding power |
| Divergent | The cutting edge of the point is only one side of each leg. The cutting edges are parallel to the crown but opposite each other   | This point allows the legs to diverge in opposite directions from each other and perpendicular to the crown. This is particularly useful when you need to gain additional holding power without increasing the size of the fastener |

## Metal

The type of metal used in the staple, as well as staple gauge and point, is important in determining suitability for an application

| Type of metal | Description | Benefit |
|---|---|---|
| Galvanised, Standard Tensile | Zinc coated | Varied applications can be exposed to the weather for a period of time |
| Stainless Steel | Totally corrosion resistant, this is SENCO's most rust resistant staple | Marine upholstery, cedar woodworking, external applications |

## Finish

The final thing to consider is the finish (coating) to be applied to the staple. Do you need more holding power or is it more important to be able to remove the staple later?

| Type of metal | Description | Benefit |
|---|---|---|
| Plain | No coatings | Used when you want to remove the staple at a later time |
| SENCOte ® | Lubricant/Glue | Allows the staple to be driven into the wood easier, then hardens into a glue for better holding power |

To ensure quality at a minimum, all SENCO staples are zinc plated.

# 6 DIGIT STAPLE CODING SYSTEM

| 1st Digit Crown width Nominal | 2nd & 3rd Digit Leg length Nominal | 4th Digit Point | 5th Digit Wire/finish | 6th Digit Coating |
|---|---|---|---|---|
| A. 4.8mm | 01 3mm | A. Blunt | A. Std. Varbon Galv. | A. Plain |
| B. 12.7mm | 02 4mm | B. Chisel | G. Stainless Steel | B. SENCOte |
| C. 9.5mm | 03 5mm | F. Divergent | | |
| E. 4.8mm | 04 6mm | | | |
| F. 12.7mm | 05 8mm | | | |
| G.9.5mm | 06 10mm | | | |
| H. 11.1mm | 07 11mm | | | |
| J. 11.1mm | 08 13mm | | | |
| K. 6.4mm | 09 14mm | | | |
| L. 6.4mm | 10 16mm | | | |
| M. 9,5mm | 11 19mm | | | |
| N. 11.1mm | 12 22mm | | | |
| P. 25.4mm | 13 25mm | | | |
| Q. 11.1mm | 14 28mm | | | |
| | 15 32mm | | | |
| | 16 35mm | | | |
| | 17 38mm | | | |
| | 18 41mm | | | |
| | 19 44mm | | | |
| | 20 47mm | | | |
| | 21 50mm | | | |
| | 22 53mm | | | |
| | 23 57mm | | | |
| | 24 60mm | | | |
| | 25 64mm | | | |

F75 Plier-SA (Indent)

J08BAA Box and Fastener

# FINE WIRE STAPLES

## J Series staples

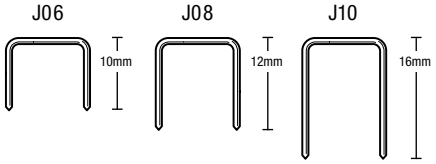


**Crown** 11.1mm
**Width** 1.90mm
**Thickness** 0.55mm

| Product Code | Length mm | Box Qty (000's) | Carton (Boxes) | SENCO F75 Plier-SA |
|---|---|---|---|---|
| **J06BAA** | 10 | 5 | 15 | X |
| **J08BAA/1** | 12 | 5 | 9 | X |
| **J10BAA** | 16 | 5 | 8 | X |

| APPLICATIONS | Bedding, recessed-end packaging, pre-assembly set-up, boxes and displays |
|---|---|

# FINE WIRE STAPLES

## A-11 Staples (Airco Brand)

(Airco Brand)

A-11




**Crown** 11mm
**Width** 1.25mm
**Thickness** 0.50mm

| Product Code | Length mm | Box Qty (000's) | Carton (Boxes) |
|---|---|---|---|
| **SF11080** | 8 | 5 | 10 |
| **SF11100** | 10 | 5 | 10 |
| **SF14100** | 10 | 10 | 20 |

| APPLICATIONS | Bedding, recessed-end packaging, pre-assembly set-up, boxes and displays |
|---|---|

## 80 Series Staples

| Product Code | Length mm | Box Qty (000's) | Carton (Boxes) | SFW09-80 |
|---|---|---|---|---|
| **80/08** | 8 | 10 | 10 | X |
| **80/10** | 10 | 10 | 10 | X |
| **80/12** | 12 | 10 | 10 | X |
| **80/14** | 14 | 10 | 10 | X |

| APPLICATIONS | Bedding, recessed-end packaging, pre-assembly set-up, boxes and displays |
|---|---|

# MEDIUM WIRE STAPLES

## L Series staples

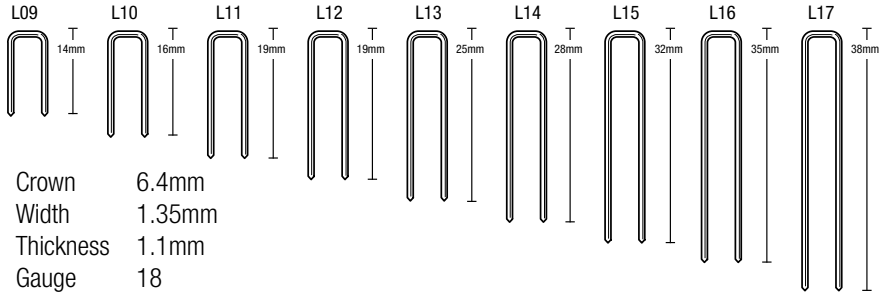


Crown 6.4mm
Width 1.35mm
Thickness 1.1mm
Gauge 18

| Product Code | Length mm | Box Qty (000's) | Carton (Boxes) | SLS18MG LS61HIP | SLS20XP-L | SKSXP |
|---|---|---|---|---|---|---|
| **L08BAB** | 12 | 5 | 12 | X | | |
| **L10BAB** | 16 | 5 | 12 | X | X | |
| **L11BAB** | 19 | 5 | 10 | X | X | |
| **L12BAB** | 22 | 5 | 10 | X | X | X |
| **L13BAB** | 25 | 5 | 8 | X | X | X |
| **L14BAB** | 28 | 5 | 6 | X | X | X |
| **L15BAB** | 32 | 5 | 6 | X | X | X |
| **L16BAB** | 35 | 5 | 6 | X | X | X |
| **L17BAB** | 38 | 5 | 6 | X | X | X |

| APPLICATIONS | Assembling drawers, lattice work, cabinet frame assembly, cabinet backs, hardboard underlay, panelling, window beating, glue blocks, light timber boxes, shoe heel assembly, general woodworking and moulding/trim. |
|---|---|

SF11080 Box and Fastener

SFW09-80

LS61HIP

SKSXP

L13BAB Box and Fastener

**Suit SENCO tools**
SLS20XP-L (Indent) SKSXP

# MEDIUM WIRE STAPLES

SLS20MXP-M Series (Indent)

## M Series staples

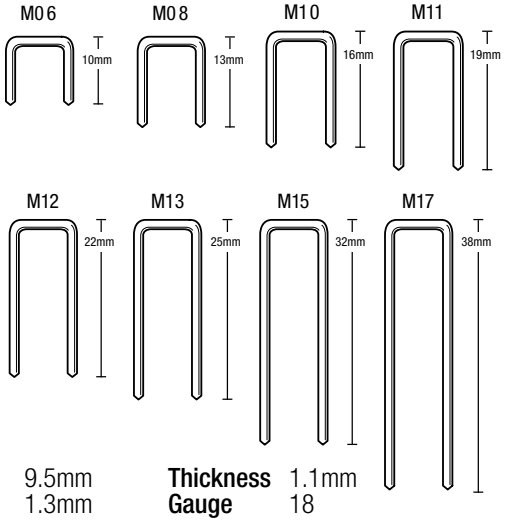


**Crown Width** 9.5mm 1.3mm
**Thickness Gauge** 1.1mm 18

M10BAB Box and Fastener
**Suit SENCO tools**
SLS20MXP (Indent)

| Product Code | Length mm | Box Qty (000's) | Carton (Boxes) | SLS20MXP |
|---|---|---|---|---|
| **M06BAB** | 10 | 10 | 7 | X |
| **M08BABALT1** | 13 | 5 | 6 | X |
| **M10BAB** | 16 | 5 | 9 | X |
| **M11BAB** | 19 | 5 | 8 | X |
| **M12BAB** | 22 | 5 | 6 | X |
| **M13BAB** | 25 | 5 | 6 | X |
| **M15BAB** | 32 | 10 | 1 | X |
| **M17BAB** | 38 | 10 | 1 | X |

| APPLICATIONS | Upholstery, furniture assembly, cabinets, decorative moulds, bedding manufacture, picture frames |
|---|---|

# HEAVY WIRE STAPLES

## N Series staples

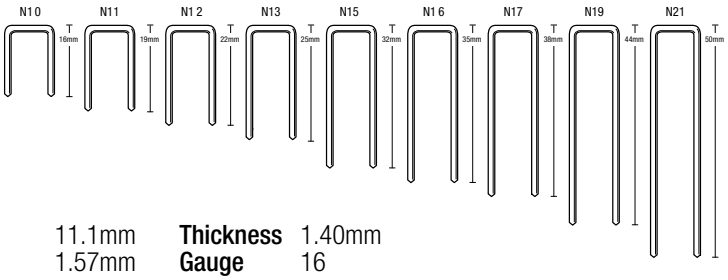


**Crown** 11.1mm **Thickness** 1.40mm
**Width** 1.57mm **Gauge** 16

| Product Code | Length mm | Box Qty (000's) | Carton (Boxes) | NS20XP |
|---|---|---|---|---|
| **N10BAB** | 16 | 18 | 1 | |
| **N11BAB** | 19 | 15 | 1 | X |
| **N12BAB** | 22 | 12 | 1 | X |
| **N13BAB** | 25 | 12 | 1 | X |
| **N13BAB/1** | 25 | 20 | 1 | X |
| **N15BAB** | 32 | 10 | 1 | X |
| **N16BAB** | 35 | 10 | 1 | X |
| **N17BAB** | 38 | 10 | 1 | X |
| **N19BAB** | 44 | 10 | 1 | X |
| **N21BAB** | 50 | 10 | 1 | X |

| APPLICATIONS | Manufactured housing, joists and flooring, decking, furniture frames, batons for plaster base, window and door frames, fascia boards, cupboards, industrial furniture frames, fencing, box and crate manufacture, pallet manufacture and repair |
|---|---|

## P Series staples

**Crown** 25mm **Thickness** 1.40mm
**Width** 1.57mm **Gauge** 16



| Product Code | Length mm | Box Qty (000's) | Carton (Boxes) | PS15XP |
|---|---|---|---|---|
| **P10BAB** | 16 | 10 | 1 | X |
| **P11BAB** | 19 | 10 | 1 | X |
| **P13BAB** | 25 | 10 | 1 | X |
| **P15BAB** | 32 | 10 | 1 | X |

| APPLICATIONS | Wire lathing, corrugated carton to skid, butt-joints and furniture/cabinet frames, foam insulation board and trusses. |
|---|---|

## Q Series staples

**Crown** 11.1mm **Thickness** 1.70mm
**Width** 1.88mm **Gauge** 15

| Product Code | Length mm | Box Qty (000's) | Carton (Boxes) | SQS55XP |
|---|---|---|---|---|
| **Q17BAB** | 38 | 5 | 1 | X |
| **Q19BAB** | 44 | 5 | 1 | X |
| **Q21BAB** | 50 | 5 | 1 | X |
| **Q23BAB** | 57 | 5 | 1 | X |
| **Q25BAB** | 64 | 5 | 1 | X |

| APPLICATIONS | Framing, furniture frames, furring, sidewall sheathing, subflooring, window units, crate and box assembly, boxes, crates, pallets and pallet repair. |
|---|---|

N11BAB Box and Fastener
**Suit SENCO tools**
NS20XP

P10BAB Box and Fastener
**Suit SENCO tools**
PS15XP

Q21BAB Box and Fastener
**Suit SENCO tools**
SQS55XP

# SPECIALITY & FLOORING STAPLES

## Galvanised Staples

| Product Code | Product Description | Box Qty (000's) |
|---|---|---|
| **G7582-75** | 75mm Galvanised angle staple | 4 |

| APPLICATIONS | But-joins in cabinet/furniture frames, door/window sash, millwork, truss construction, picture/mirror frames, wooden boxes, pallet stringer repair and trusses. |
|---|---|

## Corrugated Fasteners

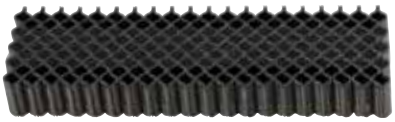

SC15
Corrugated Fastening Tool Fastener
(10mm–13mm)

| Product Code | Description | Box Qty (000's) | SC15 |
|---|---|---|---|
| **616** | SENCO Corrugated Fasteners 10mm | 5 | X |
| **816** | SENCO Corrugated Fasteners 13mm | 4 | X |

| APPLICATIONS | Joint fastening in wood, crate, pallet, truss & Box Assembly |
|---|---|

## Secret Nails

### Heavy Wire SENCO Staples

**Crown** 12.8mm
**Width** 1.30mm
**Finish** Galvanised
**Gauge** 15

FLOORPRO (1)
Secret Flooring Stapler
Fastener
(25mm–50mm)

| Product Code | Length (mm) | Box Qty (000's) | Carton (Boxes) | FLOORPRO (1) |
|---|---|---|---|---|
| **M004040** | 25 | 2 | 5 | X |
| **M004041** | 32 | 2 | 5 | X |
| **M004042** | 38 | 2 | 5 | X |
| **M004043** | 45 | 2 | 5 | X |
| **M004044** | 50 | 2 | 5 | X |

| APPLICATIONS | Hardwood flooring. For concealed fastening of tongue and groove flooring. |
|---|---|

# SENCO COLLATED SCREWS

**With the SENCO collated screw-range you can drive more screws faster and with greater accuracy which results in quicker installations, lower costs, and greater profitability.**
**A collated screw gun like the DuraSpin is able to sink a screw 5 cm below the surface of hard wood.**

## Finish Type

| Finish | Description |
|---|---|
| **Zinc & Yellow Zinc** | Thin layer or electroplated zinc provides minimal protection for |
| **Weatherex** | A patented engineered coating to provide corrosion protection in timber |
| **Stainless Steel** | The highest level of corrosion protection for outdoor and corrosive environments |

## Drive Type

| Drive | Description |
|---|---|
| **PH2** | Widely used on drywall screws. Designed to cam-out |
| **SQ** | Designed for high-torque application such as decking screws |
| **SENCO 25** | Patented drive exclusive to SENCO which features points to help hold the bit in place without magnets |

## Head Type

| Head | Description |
|---|---|
| **Ribbed** | Ribs under the head allow for countersinking in timber |
| **Bugle** | Curved head with no ribs which do not split plasterboard paper |

## Point Type

| Point | Description |
|---|---|
| **Sharp** | Commonly found in drywall screws to bite into soft material |
| **T17** | Cut-away Type-17 design for dust extraction |
| **X** | Self drilling cross point for use in decking applications |
| **Drill** | self-tapping for use in thin metal sheet |
| **Wing** | For use in timber to steel. Drill tip with wings that break off once the steel is cleared. |

DS522-18V

DS722-18V

08R50MWTA Bucket and Fastener

06A32MYA Box and Fastener

# COLLATED SCREWS

## Flooring, Sheathing & Crates (Includes driver bit)

| Application | Product Code | Size | Head |
|---|---|---|---|
| Flooring, sheathing, crates | **10D50MYTA** | 10G x 50 | Flat head with nibs |

## Sub-floor to Timber (Includes driver bit)

| Application | Product Code | Size | Head |
|---|---|---|---|
| Sub-floor to timber | ***10F50MYTA** | 10G x 50 | Flat head with nibs |
| Sub-floor to timber | ***10F50MYBA** | 10G x 50 | Flat head with nibs |

** Complies with AS1860.2 for Particale Board (sub-floor) installation.*

## Timber to Steel - Exterior (Includes driver bit)

| Application | Product Code | Size | Head |
|---|---|---|---|
| Timber to steel - exterior | **10G45MWTA** | 10G x 45 | Flat head with nibs |

## Cladding to Steel - Exterior (Includes driver bit)

| Application | Product Code | Size | Head |
|---|---|---|---|
| Cladding to steel - exterior | **08G41MWTA** | 8G x 41 | Flat head with nibs |

## Exterior Timber (Includes driver bit)

| Application | Product Code | Size | Head |
|---|---|---|---|
| Exterior Decking SS | **10DX65MSA** | 10G x 65 | Flush finish |
| | ***10DX50MSA** | 10G x 50 | Flush finish |
| Exterior timber | ***10D50MWTA** | 10G x 50 | Flat head with nibs |
| | **09D65MWTA** | 9G x 65 | Flat head with nibs |

** Complies with AS1684.2 and AS1684.3 (Construction Standard) for decking boards up to 22mm thick.*

## Composite Deck to Timber

| Application | Product Code | Size | Head |
|---|---|---|---|
| Composite deck to timber | **08R50MWTA** | 8G x 50 | Trim head with nibs |
| | **08R65MWTA** | 8G x 65 | Trim head with nibs |
| Composite deck to timber SS | **08R50MS04TA** | 8G x 50 | Trim head with nibs |
| | **08R65MS04TA** | 8G x 65 | Trim head with nibs |

## Gypsum/Cement Sheet to Timber/Light Steel

| Application | Product Code | Size | Head |
|---|---|---|---|
| Gypsum/cement sheet | **07J45MWA** | 7G x 45 | Trim head with nibs |

## Underlay/Sheathing to Timber (Includes driver bit)

| Application | Product Code | Size | Head |
|---|---|---|---|
| Underlay/sheathing to timber | **07Q32MYA** | 7G x 32 | Trim head with nibs |

## Plasterboard to Timber/Steel

| Application | Product Code | Size | Head |
|---|---|---|---|
| Plasterboard to timber | **06A25MYA** | 6G x 25 | Bugle |
| | **06A32MYA** | 6G x 32 | Bugle |
| Plasterboard to steel | **06B25MYA** | 6G x 25 | Bugle |
| | **06B32MYA** | 6G x 32 | Bugle |

| Point | Finish | Drive | Thread | QTY |
|---|---|---|---|---|
| T17 | Yellow Zinc | SQ2 | 2/3 Coarse | Tub 700 |

| Point | Finish | Drive | Thread | QTY |
|---|---|---|---|---|
| T17 | Yellow Zinc | T25 | 2/3 Coarse Dual | Tub 700 |
| T17 | Yellow Zinc | T25 | 2/3 Coarse Dual | Box 2,000 |



| Point | Finish | Drive | Thread | QTY |
|---|---|---|---|---|
| Wing drill | Weatherex | SQ2 | Fine | Tub 800 |



| Point | Finish | Drive | Thread | QTY |
|---|---|---|---|---|
| Wing drill | Weatherex | SQ2 | Fine | Tub 800 |



| Point | Finish | Drive | Thread | QTY |
|---|---|---|---|---|
| Pilot Drill | SS | T25 | Coarse | Tub 800 |
| Pilot Drill | SS | T25 | Coarse | Tub 800 |
| T17 | Weatherex | SQ2 | 2/3 Coarse | Tub 700 |
| T 17 | Weatherex | SQ2 | 2/3 Coarse | Tub 800 |



| Point | Finish | Drive | Thread | QTY |
|---|---|---|---|---|
| T17 | Weatherex | SQ2 | 2/3 Coarse | Tub 1,000 |
| T17 | Weatherex | SQ2 | 2/3 Coarse | Tub 800 |
| T17 | SS | SQ2 | 2/3 Coarse | Tub 1,000 |
| T17 | SS | SQ2 | 2/3 Coarse | Tub 800 |

## (Includes driver bit)



| Point | Finish | Drive | Thread | QTY |
|---|---|---|---|---|
| Sharp | Weatherex | PH2 | Fine | Box 1000 |



| Point | Finish | Drive | Thread | QTY |
|---|---|---|---|---|
| Sharp | Yellow Zinc | SQ2 | Hi Lo | Box 1000 |

| Point | Finish | Drive | Thread | QTY |
|---|---|---|---|---|
| Sharp | Yellow Zinc | PH2 | Coarse | Box 1000 |
| Sharp | Yellow Zinc | PH2 | Coarse | Box 1000 |
| Sharp | Yellow Zinc | PH2 | Fine | Box 1000 |
| Sharp | Yellow Zinc | PH2 | Fine | Box 1000 |

DS522-18V

DS530-M1

| Product code | Page No. |
|---|---|
| 616 | 22 |
| 816 | 22 |
| 06A25MYA | 24 |
| 06A32MYA | 24 |
| 06B25MYA | 24 |
| 06B32MYA | 24 |
| 07J45MWA | 24 |
| 07Q32MYA | 24 |
| 08G41MWTA | 24 |
| 08R50MS04T | 24 |
| 08R50MWTA | 24 |
| 08R65MS04T | 24 |
| 08R65MWTA | 24 |
| 09D65MWTA | 24 |
| 10D50MWTA | 24 |
| 10D50MYTA | 24 |
| 10DX50MSA | 24 |
| 10DX65MSA | 24 |
| 10F50MYTA | 24 |
| 10G45MWTA | 24 |
| 80/08 | 19 |
| 80/10 | 19 |
| 80/12 | 19 |
| 80/14 | 19 |
| AY10EAA | 11 |
| AY11EAA | 11 |
| AY13EAA | 11 |
| BC21AUAD | 14 |
| BE19ASAUM | 14 |
| BE21ASAUM | 14 |
| BE21AUAD | 14 |
| BF15AHAD | 14 |
| BF15AHAUP | 14 |
| BF15AHAUTP | 13 |
| BF16AHAF | 14 |
| BF16AHAFTP | 13 |
| BF17AHAU | 14 |
| BM21AGAU | 14 |
| BM21AGAUTP | 13 |
| BM21ASAD | 14 |
| BM21ASAU | 14 |
| BM21ASAUTP | 13 |
| BO21AGAU | 14 |
| BO21AGAUTP | 13 |
| BO21ASAD | 14 |

| Product code | Page No. |
|---|---|
| BO21ASAU | 14 |
| BO21ASAUTP | 13 |
| BTN50APBTP | 13 |
| BTN57APBS | 13 |
| C119 | 11 |
| C125 | 11 |
| C130 | 11 |
| C140 | 11 |
| C150 | 11 |
| C19 | 11 |
| C25 | 11 |
| C32 | 11 |
| C38 | 11 |
| C45 | 11 |
| C50 | 11 |
| C63 | 11 |
| DA13EPB | 10 |
| DA13EZB | 10 |
| DA15EPB | 10 |
| DA15EZB | 10 |
| DA17AIA | 10 |
| DA17EPB | 10 |
| DA17EZB | 10 |
| DA19AIA | 10 |
| DA19EPB | 10 |
| DA19EZB | 10 |
| DA21EPB | 10 |
| DA21EZB | 10 |
| DA23EPB | 10 |
| DA23EZB | 10 |
| DA25EPB | 10 |
| DA25EZB | 10 |
| G7582-75 | 22 |
| GC21APB | 8 |
| GC21ASB | 8 |
| GC25APB | 8 |
| GC25ASB | 8 |
| GE21APB | 8 |
| GE25APB | 8 |
| Gold55 | 9 |
| Gold65 | 9 |
| GTN57APB | 13 |
| GTN57APBR | 13 |
| HC25APB | 8 |
| HC27AAB | 8 |

| Product code | Page No. |
|---|---|
| HC27APB | 8 |
| HC27ASB | 8 |
| HC27CPB | 8 |
| HE27APB | 8 |
| HF27APB | 8 |
| J06BAA | 18 |
| J08BAA/1 | 18 |
| J10BAA | 18 |
| JC15ASAUP | 14 |
| JC15AUAU | 14 |
| JF15AUAD | 14 |
| JF15AUAU | 14 |
| KC100APB | 8 |
| KC29APB | 8 |
| KC29ASB | 8 |
| L08BAB | 19 |
| L10BAB | 19 |
| L11BAB | 19 |
| L12BAB | 19 |
| L13BAB | 19 |
| L14BAB | 19 |
| L15BAB | 19 |
| L16BAB | 19 |
| L17BAB | 19 |
| M002262 | 9 |
| M004040 | 22 |
| M004041 | 22 |
| M004042 | 22 |
| M004043 | 22 |
| M004044 | 22 |
| M06BAB | 20 |
| M08BABALT1 | 20 |
| M10BAB | 20 |
| M11BAB | 20 |
| M12BAB | 20 |
| M13BAB | 20 |
| M15BAB | 20 |
| M17BAB | 20 |
| N10BAB | 21 |
| N11BAB | 21 |
| N12BAB | 21 |
| N13BAB | 21 |
| N13BAB/1 | 21 |
| N15BAB | 21 |
| N16BAB | 21 |

| Product code | Page No. |
|---|---|
| N17BAB | 21 |
| N19BAB | 21 |
| N21BAB | 21 |
| P10BAB | 21 |
| P11BAB | 21 |
| P13BAB | 21 |
| P15BAB | 21 |
| Q17BAB | 21 |
| Q19BAB | 21 |
| Q21BAB | 21 |
| Q23BAB | 21 |
| Q25BAB | 21 |
| RH15EAA | 11 |
| RH17EAA | 11 |
| RH19EAA | 11 |
| RH21EAA | 11 |
| RH25EAA | 11 |
| SF11080 | 19 |
| SF11100 | 19 |
| SF14100 | 19 |

SENCO®

MAKE IT LAST.

# DISPLAY STAND

## Add a SENCO Display Stand to enhance your instore range for better merchandising

AIRCO® BRANDS

# ONLINE ORDERING PORTAL NOW AVAILABLE!

- Online ordering
- Live stock on hand
- Credit raising
- Live statement
- Secure online payment
- Access to promotions and marketing material
- Live pricing

**TO REGISTER VISIT:** https://www.aircobrands.com.au/customer/account/login/

Note: Available to account customers only. Not available to the general public*

SENCO®

# FASTENERS
## CATALOGUE

**FIRST EDITION**

AIRCO® BRANDS


**NEW SOUTH WALES Head Office**
178-180 Adderley Street West,
Auburn, NSW 2144

**VICTORIA**
25 Logis Boulevarde,
Dandenong South, VIC 3175

**QUEENSLAND**
13 Gassman Drive,
Yatala, QLD 4207

**SOUTH AUSTRALIA**
1/2 E.W. Pitts Avenue,
Cavan, SA 5094

**WESTERN AUSTRALIA**
14 Alex Wood Drive,
Fooestdale, WA 6112

**CONTACT DETAILS**
Postal Address: PO Box 6598 Silverwater NSW 2128
Phone: 1300 365 800
Fax: 1300 365 888
Email: orders@aircobrands.com.au



© Copyright 2024 Airco Fasteners Pty LTD


ABN 94 068 705 699



OHS Management System · ISO 45001 Global-Mark.com.au®
Environmental Management · ISO14001 Global-Mark.com.au®
Quality Management · ISO 9001 Global-Mark.com.au®